


www.fluidtec.com

FILTRO ESTÁNDAR SERIE FOFR




TAMAÑO DE PUERTO	CON ELEMENTO FILTRANTE DE 40 MICRAS PURGA MANUAL	CON ELEMENTO FILTRANTE DE 40 MICRAS PURGA AUTOMÁTICA	CON ELEMENTO FILTRANTE DE 5 MICRAS PURGA MANUAL	CON ELEMENTO FILTRANTE DE 5 MICRAS PURGA AUTOMÁTICA
G1/4	FOFR-1/4-MINI	FOFR-1/4-MINI-A	FOFR-1/4-5M-MINI	FOFR-1/4-5M-MINI-A
G3/8	FOFR-3/8-MINI	FOFR-3/8-MINI-A	FOFR-3/8-5M-MINI	FOFR-3/8-5M-MINI-A
G1/2	FOFR-1/2-MIDI	FOFR-1/2-MIDI-A	FOFR-1/2-5M-MIDI	FOFR-1/2-5M-MIDI-A
G3/4	FOFR-3/4-MAXI	FOFR-3/4-MAXI-A	FOFR-3/4-5M-MAXI	FOFR-3/4-5M-MAXI-A
G1	FOFR-1-MAXI	FOFR-1-MAXI-A	FOFR-1-5M-MAXI	FOFR-1-5M-MAXI-A

ESPECIFICACIONES

	1/4	3/8	1/2	3/4	1
Fluido	Aire comprimido				
Flujo de aire l/min	2000	2300	2600	7000	8000
Precisión de trabajo máximo	0.5 a 12 Bar				
Grado de filtración	5/4 Micras				
Capacidad del vaso del filtro	20 ml				
Montaje	En tubería de manera vertical				
Temperatura de operación	0 ~ 60°C				
Materiales de fabricación	Carcasa de aleación de Zinc, Protección en aleación de aluminio y Vasos en policarbonato				

FILTRO REGULADOR SERIE FOFR

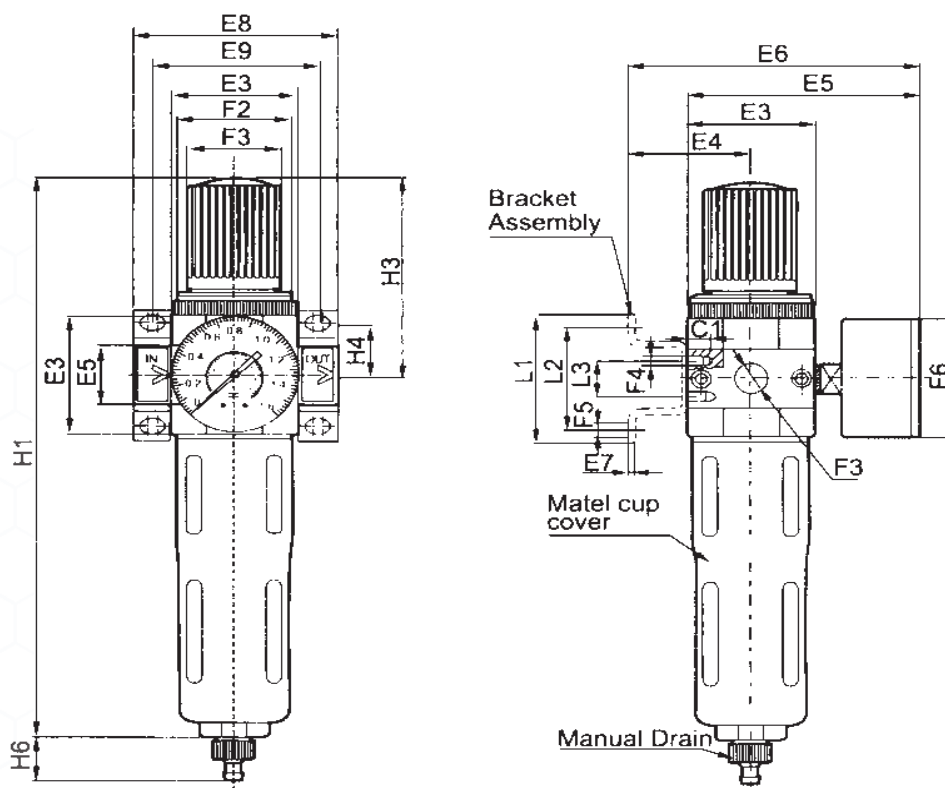

DIMENSIONES

MODELO	E3	E4	E5	E6	E8	E9	F1	F2	F30
FOFR...MINI	40	39	76	95	64	52	G1/4", G3/8"	M36x1.5	31
FOFR...MIDI	55	47	93	112	85	70	G1/2", G3/4"	M52x1.5	50
FOFR...MAXI	66	53	104	124	96, 116	96, 116	G3/4", G1"	M36x1.5	31

MODELO	F4	F5Φ	F6Φ	L1	L2	L3	H1	H3	H4	H5	H6
FOFR...MINI	M4	4.5	40	44	35	11	194	69	17.5	20	15
FOFR...MIDI	M5	5.5	52	71	60	22	250	98	24.5	32	15
FOFR...MAXI	M6	5.5	63	71	60	22	252	80	24.5	32, 40	15