




# CONEXIONES NEUMÁTICAS RECTOS

# CONECTOR RECTO SERIE PC


*Fluidtec*  
Automation

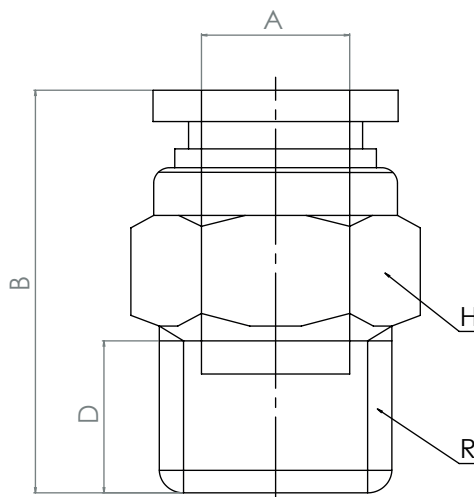

| TAMAÑO DE CUERDA (R) | TAMAÑO DE MANGUERA (mm) (A) | MODELO  | B    | H  | D   |
|----------------------|-----------------------------|---------|------|----|-----|
| 1/8                  | 4                           | PC04-01 | 19   | 10 | 7   |
| 1/4                  |                             | PC04-02 | 19   | 10 | 9.5 |
| 1/8                  | 6                           | PC06-01 | 20   | 12 | 7   |
| 1/4                  |                             | PC06-02 | 21   | 14 | 9.5 |
| 3/8                  |                             | PC06-03 | 23   | 17 | 10  |
| 1/2                  |                             | PC06-04 | 24   | 17 | 13  |
| 1/8                  | 8                           | PC08-01 | 24.5 | 14 | 7   |
| 1/4                  |                             | PC08-02 | 24.5 | 14 | 9.5 |
| 3/8                  |                             | PC08-03 | 25   | 17 | 10  |
| 1/2                  |                             | PC08-04 | 26   | 21 | 13  |
| 1/8                  | 10                          | PC10-01 | 29.5 | 17 | 7   |
| 1/4                  |                             | PC10-02 | 29.5 | 17 | 9.5 |
| 3/8                  |                             | PC10-03 | 28.5 | 17 | 10  |
| 1/2                  |                             | PC10-04 | 26   | 21 | 13  |
| 1/4                  | 12                          | PC12-02 | 32.5 | 20 | 9.5 |
| 3/8                  |                             | PC12-03 | 32.5 | 20 | 10  |
| 1/2                  |                             | PC12-04 | 27.5 | 21 | 13  |
| 3/8                  | 14                          | PC14-03 | 34.5 | 21 | 10  |
| 1/2                  |                             | PC14-04 | 33.8 | 21 | 13  |
| 3/8                  | 16                          | PC16-03 | 37   | 23 | 11  |
| 1/2                  |                             | PC16-04 | 37   | 23 | 14  |

# CONECTOR RECTO ESTANDAR

## SERIE PC

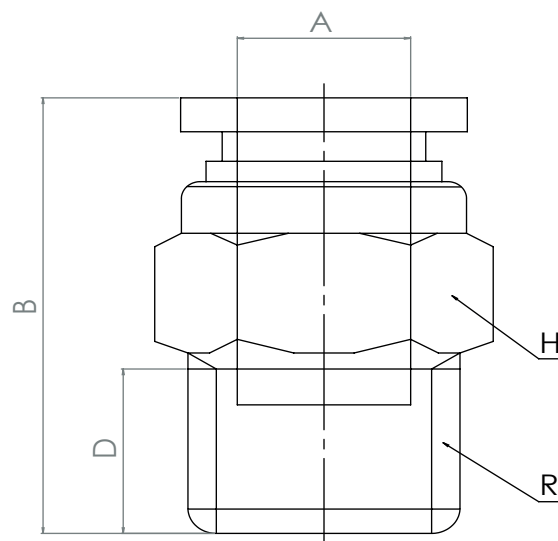


| TAMAÑO DE CUERDA (R) | TAMAÑO DE MANGUERA (mm) (A) | MODELO   | B  | H  | D  |
|----------------------|-----------------------------|----------|----|----|----|
| 1/8                  | 1/8                         | PC1/4-N1 | 20 | 12 | 7  |
| 1/4                  |                             | PC1/4-N2 | 20 | 14 | 9  |
| 3/8                  |                             | PC1/4-N3 | 20 | 16 | 10 |
| 1/8                  | 3/8                         | PC3/8-N1 | 27 | 16 | 7  |
| 1/4                  |                             | PC3/8-N2 | 27 | 16 | 9  |
| 3/8                  |                             | PC3/8-N3 | 27 | 16 | 10 |
| 1/2                  |                             | PC3/8-N4 | 26 | 21 | 13 |
| 1/4                  | 1/2                         | PC1/2-N2 | 32 | 19 | 10 |
| 3/8                  |                             | PC1/2-N3 | 29 | 19 | 10 |
| 1/2                  |                             | PC1/2-N4 | 31 | 21 | 13 |

# CONECTOR RECTO METÁLICO

## SERIE MPC


*Fluidtec*  
Automation

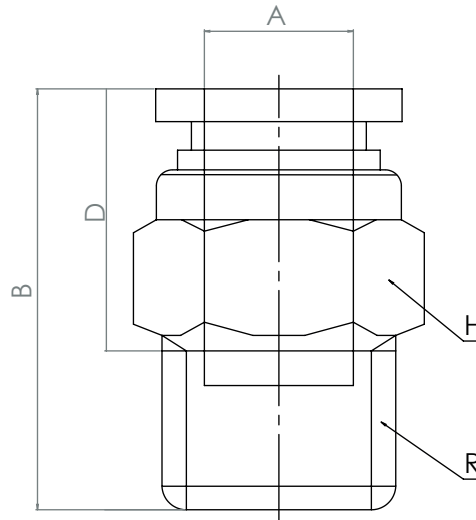

| TAMAÑO DE CUERDA (R) | TAMAÑO DE MANGUERA (mm) (A) | MODELO   | H  | D    | B    |
|----------------------|-----------------------------|----------|----|------|------|
| M5                   | 4                           | MPC04-M5 | 6  | 15   | 20.5 |
| 1/8                  |                             | MPC04-01 | 6  | 10.5 | 17   |
| 1/4                  |                             | MPC04-02 | 8  | 10.5 | 18   |
| M5                   | 6                           | MPC06-M5 | 6  | 18.5 | 25   |
| 1/8                  |                             | MPC06-01 | 6  | 17   | 24   |
| 1/4                  |                             | MPC06-02 | 8  | 12   | 20   |
| 3/8                  |                             | MPC06-03 |    | 12   | 20   |
| 1/2                  |                             | MPC06-04 | 12 | 12   | 21   |
| 1/8                  | 8                           | MPC08-01 | 6  | 19   | 27   |
| 1/4                  |                             | MPC08-02 | 8  | 18.5 | 26.5 |
| 3/8                  |                             | MPC08-03 | 10 | 11.5 | 20.8 |
| 1/2                  |                             | MPC08-04 | 12 | 11   | 21.5 |
| 1/8                  | 10                          | MPC10-01 | 6  | 19   | 28.2 |
| 1/4                  |                             | MPC10-02 | 8  | 18.8 | 28   |
| 3/8                  |                             | MPC10-03 | 10 | 14.5 | 23   |
| 1/2                  |                             | MPC10-04 | 12 | 11   | 22   |
| 1/4                  | 12                          | MPC12-02 | 8  | 19   | 30   |
| 3/8                  |                             | MPC12-03 | 10 | 19   | 28   |
| 1/2                  |                             | MPC12-04 | 12 | 10   | 21   |


# CONECTOR RECTO INOXIDABLE

## SERIE SSPC

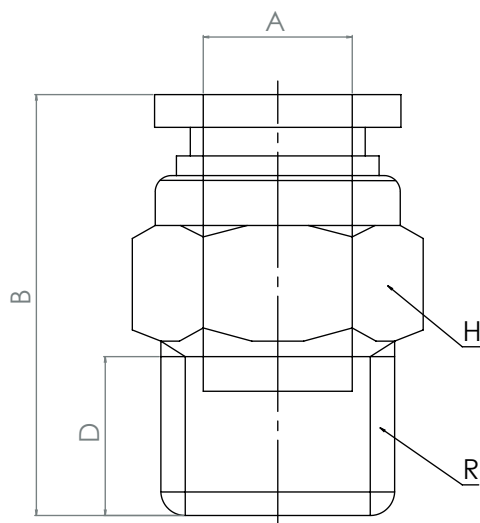


| TAMAÑO DE CUERDA (R) | TAMAÑO DE MANGUERA (mm) (A) | MODELO    | B    | H  | D    |
|----------------------|-----------------------------|-----------|------|----|------|
| 1/8                  | 8                           | SSPC08-01 | 23.5 | 14 | 6.9  |
| 1/4                  |                             | SSPC08-02 | 24.6 | 14 | 8.5  |
| 3/8                  |                             | SSPC08-03 | 26.5 | 17 | 8.5  |
| 1/8                  | 10                          | SSPC10-01 | 26   | 17 | 7.8  |
| 1/4                  |                             | SSPC10-02 | 28.8 | 17 | 7.9  |
| 3/8                  |                             | SSPC10-03 | 29.1 | 17 | 7.5  |
| 1/2                  |                             | SSPC10-04 | 25.2 | 21 | 10.4 |
| 1/4                  | 12                          | SSPC12-02 | 30.6 | 19 | 8    |
| 3/8                  |                             | SSPC12-03 | 28.4 | 19 | 9.3  |
| 1/2                  |                             | SSPC12-04 | 30.5 | 22 | 9.5  |

## COPLE PASAMURO RECTO SERIE PM

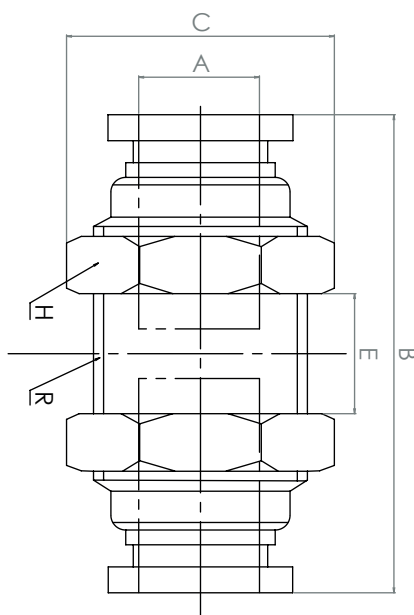

| MODELO | A  | B    | C    | H  | R     |
|--------|----|------|------|----|-------|
| PM04   | 4  | 29   | 10   | 14 | 12X1  |
| PM06   | 6  | 31   | 10.5 | 17 | 14X1  |
| PM08   | 8  | 37.5 | 13.5 | 19 | 14X16 |
| PM10   | 10 | 39   | 11.5 | 24 | 20X1  |
| PM12   | 12 | 44.5 | 15   | 27 | 22X1  |

## CONECTOR PASAMURO HEMBRA SERIE PMF

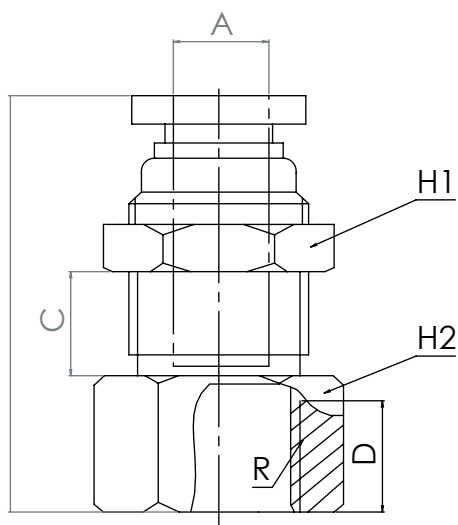

| MODELO   | A  | B    | C   | D    | H  | H2 | R   |
|----------|----|------|-----|------|----|----|-----|
| PMF06-01 | 4  | 25   | 7   | 7.5  | 17 | 17 | M14 |
| PMF06-02 | 4  | 29.5 | 7   | 12   | 17 | 17 | M14 |
| PMF08-01 | 6  | 26.5 | 8   | 6    | 19 | 19 | M16 |
| PMF08-02 | 6  | 32   | 8   | 12   | 19 | 19 | M16 |
| PMF08-03 | 6  | 34.5 | 8   | 14   | 20 | 20 | M16 |
| PMF10-02 | 8  | 31.5 | 9   | 9.5  | 21 | 24 | M20 |
| PMF10-03 | 8  | 32.5 | 9   | 10.5 | 21 | 24 | M20 |
| PMF10-04 | 8  | 38   | 8.5 | 16   | 24 | 24 | M20 |
| PMF12-03 | 10 | 34.5 | 8.5 | 13   | 24 | 27 | M22 |
| PMF12-04 | 10 | 36   | 9.5 | 15   | 24 | 26 | M22 |